



#TheMH25 – Mirror Head 25 Christie HS-Series

#TheMH25 – A tool the industry has been waiting for. – You can now align and move projection positions and create fascinating shows with 1DLP laser projectors by Christie HS Series, like the D20WU-HS, D16WU-HS, D13WU-HS and many more.


Use your projectors to their full potential. – #TheMH25 is the pair of wings for your projector. Now you can easily move projection positions to reach more surfaces and project bright and colourful content across an entire room.

Optimized for professional show integrators. – You can easily mount the base plate to your projector to use closed-type riggings such as half-coupler clamps or any VESA mount.

Ideal for rental and touring. – #TheMH25 is equipped with a quick, easy and secure mounting done in less than a minute while you are on the road.

It is important to note. – #TheMH25 has been designed and is produced in Austria to ensure a high-level of performance. Dynamic Projection Institute has designed this powerful tool to operate at industry-levels of efficiency and we guarantee accurate projection positioning.

SPECIFICATIONS MIRROR HEAD 25 WITH CHRISTIE D20WU-HS

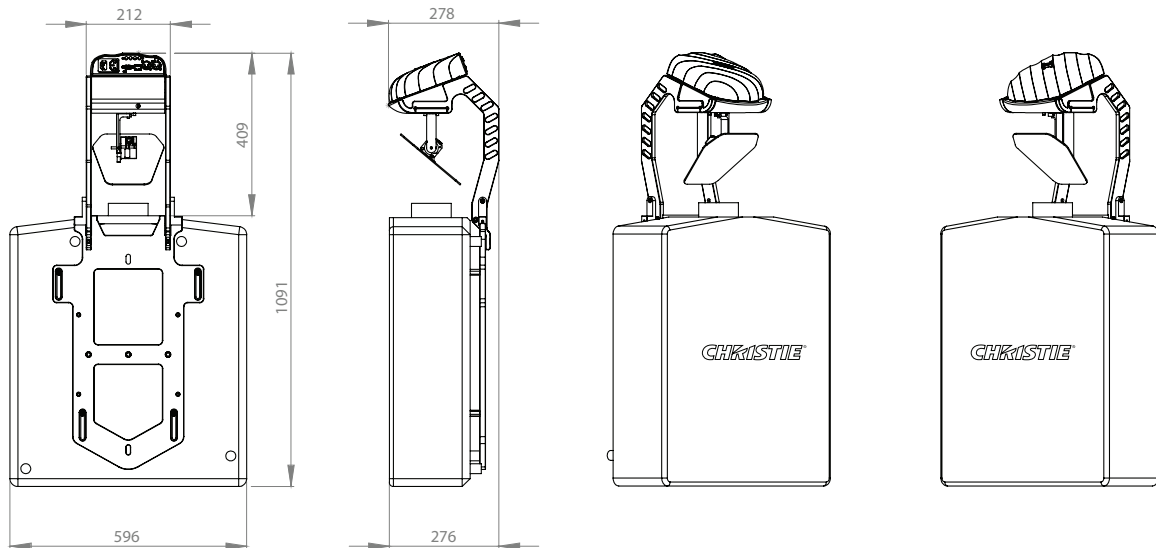

MECHANICAL SPECIFICATIONS WITH D20WU-HS

Fixture dimensions (W/D/H)	596 x 276 x 1091 mm
Fixture total	51 kg
Projector + lens	43 kg
Mirror Head 25	8 kg

PROJECTOR COMPATIBILITY

D13WU-HS	1920 x 1200	- 12,000 ANSI
D13HD-HS	1920 x 1080	- 11,500 ANSI
D16WU-HS	1920 x 1200	- 15,500 ANSI
D16HD-HS	1920 x 1080	- 14,000 ANSI
D20WU-HS	1920 x 1200	- 18,500 ANSI
D20HD-HS	1920 x 1080	- 16,500 ANSI
4K7-HS	3840 x 2160	- 7,000 ANSI
4K10-HS	3840 x 2160	- 10,000 ANSI

LENS COMPATIBILITY LIST FOR CHRISTIE HS SERIES


140-109101-01	140-110103-01	140-111104-01	140-116109-01
Standard Lens TR: 1.2 - 1.5:1	Zoom lens (full ILS) TR: 1.5 - 2:1	Zoom lens (full ILS) TR: 2 - 4:1	Zoom lens (full ILS) TR: 4 - 72:1

NOTE: Due to optical reasons we do not recommend this lens below a throw ratio of 1.6:1.

ELECTRICAL SPECIFICATIONS

INPUT POWER
100-240V / 2-1A / 50-60Hz,
Max. 10A (3-prong C14 male socket)

POWER CONSUMPTION
Max. 17W
Standby mode 3W

 Caution! There are no user serviceable parts (fuse) inside this unit.

ITEM NUMBER: MH25


- Package dimensions (W/D/H): 675 x 400 x 350 mm
- Package weight: 11.2 kg
- Package includes: Mirror Head unit, Manual, RS232 cable, A/C power cable, Mounting screws and spacers, Metric Hex key 2 mm and 5 mm

IMPORTANT NOTE: For information about the specifications, operations and use of the projector carefully read the instruction manual of your projector.



<https://www.christiedigital.com/emea/business/products/projectors/1-chip-dlp/hs-series>

MIRROR HEAD SPECIFICATIONS / FEATURES




- High resolution 16bit Pan / Tilt mirror movement
- DMX-512 control over 14 DMX channels
- DMX-IN and DMX-OUT / Through port (5-pin male and female XLR connectors)
- 14 DMX channels are required to control the unit
- Art-Net™ connection (RJ45) (Art-Net™ designed by and Copyright Artistic License Holdings Ltd.)
- High resolution micro step motors with maintenance free direct drive
- Self calibrating mirror position for high accuracy
- Absolute reposition accuracy smaller than 0.03°
- Movement accuracy: Pan and Tilt from the same direction to the programmed point within approximately 0.01°
- RS232 remote control connection for projector (D-sub 9 male) - cable included
- Flash-able firmware (Mini USB OTG)
- High resolution LED-Display for easy configuration
- LED-Display back-light auto turn off for energy saving
- LED-Display Flip / Flop mode for easy reading in difficult positions
- Coated mirror for optimum reflection ~98% refraction factor
- Optimized mirror optics for the specific projector
- Passive cooled system (excluding projector)
- Environmental tolerances: Ambient operating temperature range: 5°–35°C, Humidity: 20%–80% (non-condensing)
- Quick, secure and easy snap-in mounting
- Anodized light metal construction

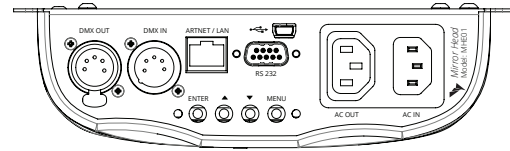

Control unit / MHE01

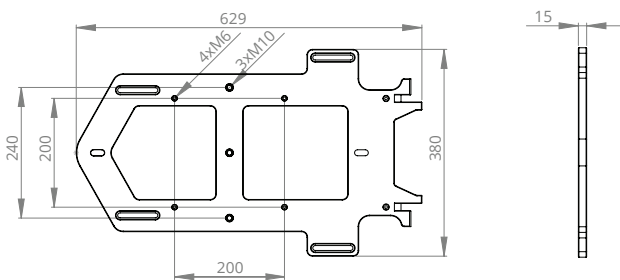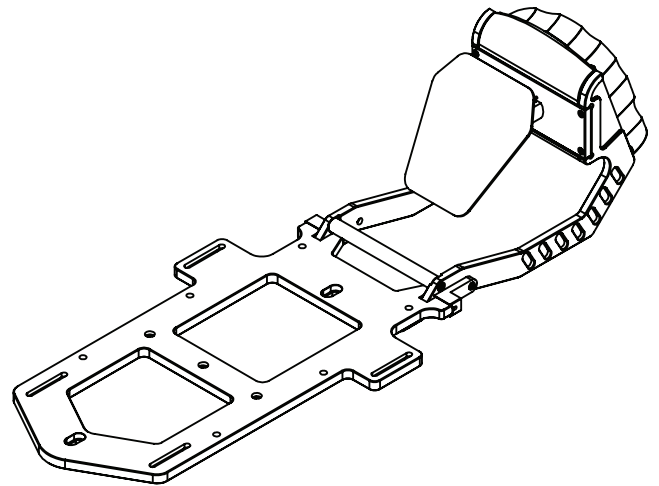

The MH25 base plate supports 3 x M10 threads and VESA 200 with 4 x M6, max. screw depth = 15 mm.

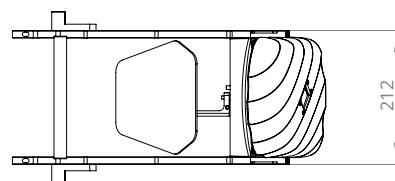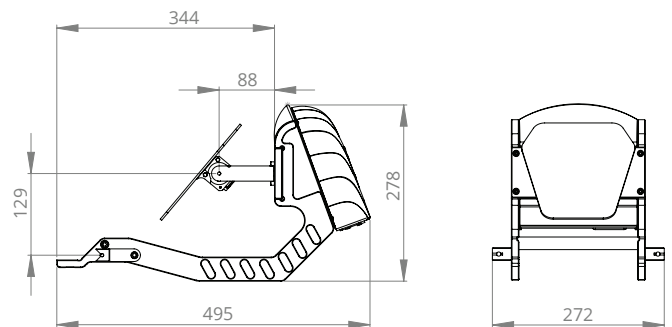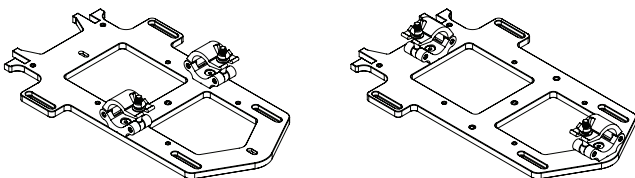

CAUTION: For the use of closed-type riggings such as half-coupler clamps secure the fixture with a safety cable (or other secondary attachments) that is approved for the weight of the fixture, so that the safety cable will hold the fixture if the primary attachment fails.

