




Mounting guide ULS Mirror – Barco UDX / UDM

1. Mount the two ULS mounting adapter MHZ-U29 onto the projector base plate MHB-2901, using 4x M6 x 35 socket screws.

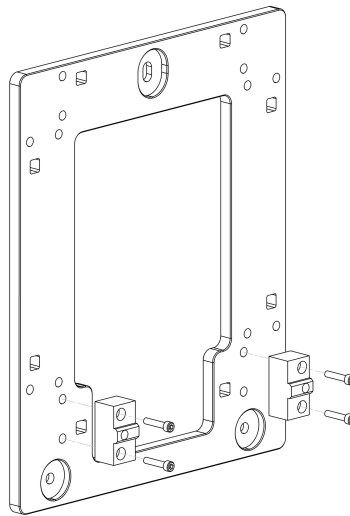


2. Mount three Global Truss 812B Half Coupler, or similar onto the projector base plate MHB-2901.

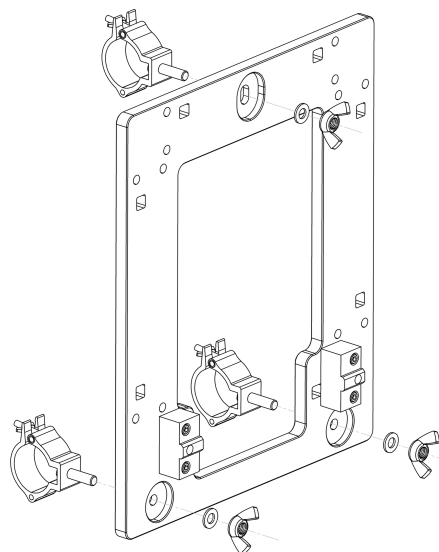





3. Mount the projector base plate MHB-2901 onto the frame of your Barco UDX / UDM projector, pay attention to the centering with the optics.

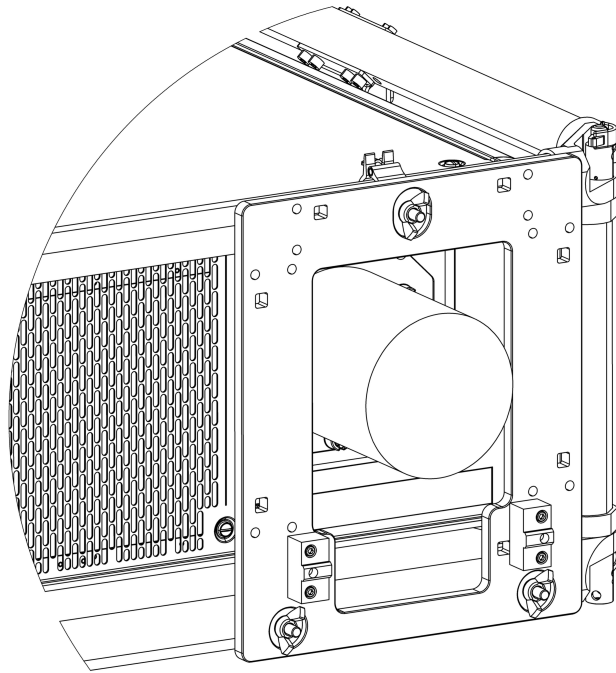



4. Mount the ULS Pole onto the ULS base plate ULS-BP02 using the 4x M6 x 16 countersunk screws as shown below.

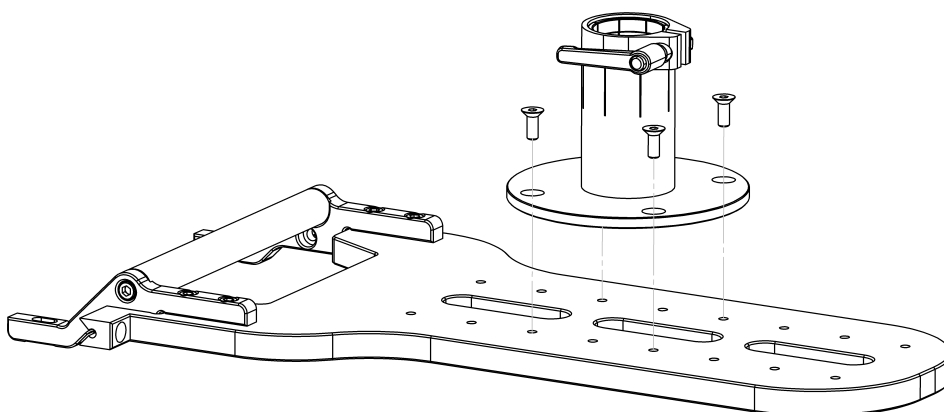




5. Mirror assembly, in the figure is a ULS-M340 mirror (340 x 250 mm) shown.

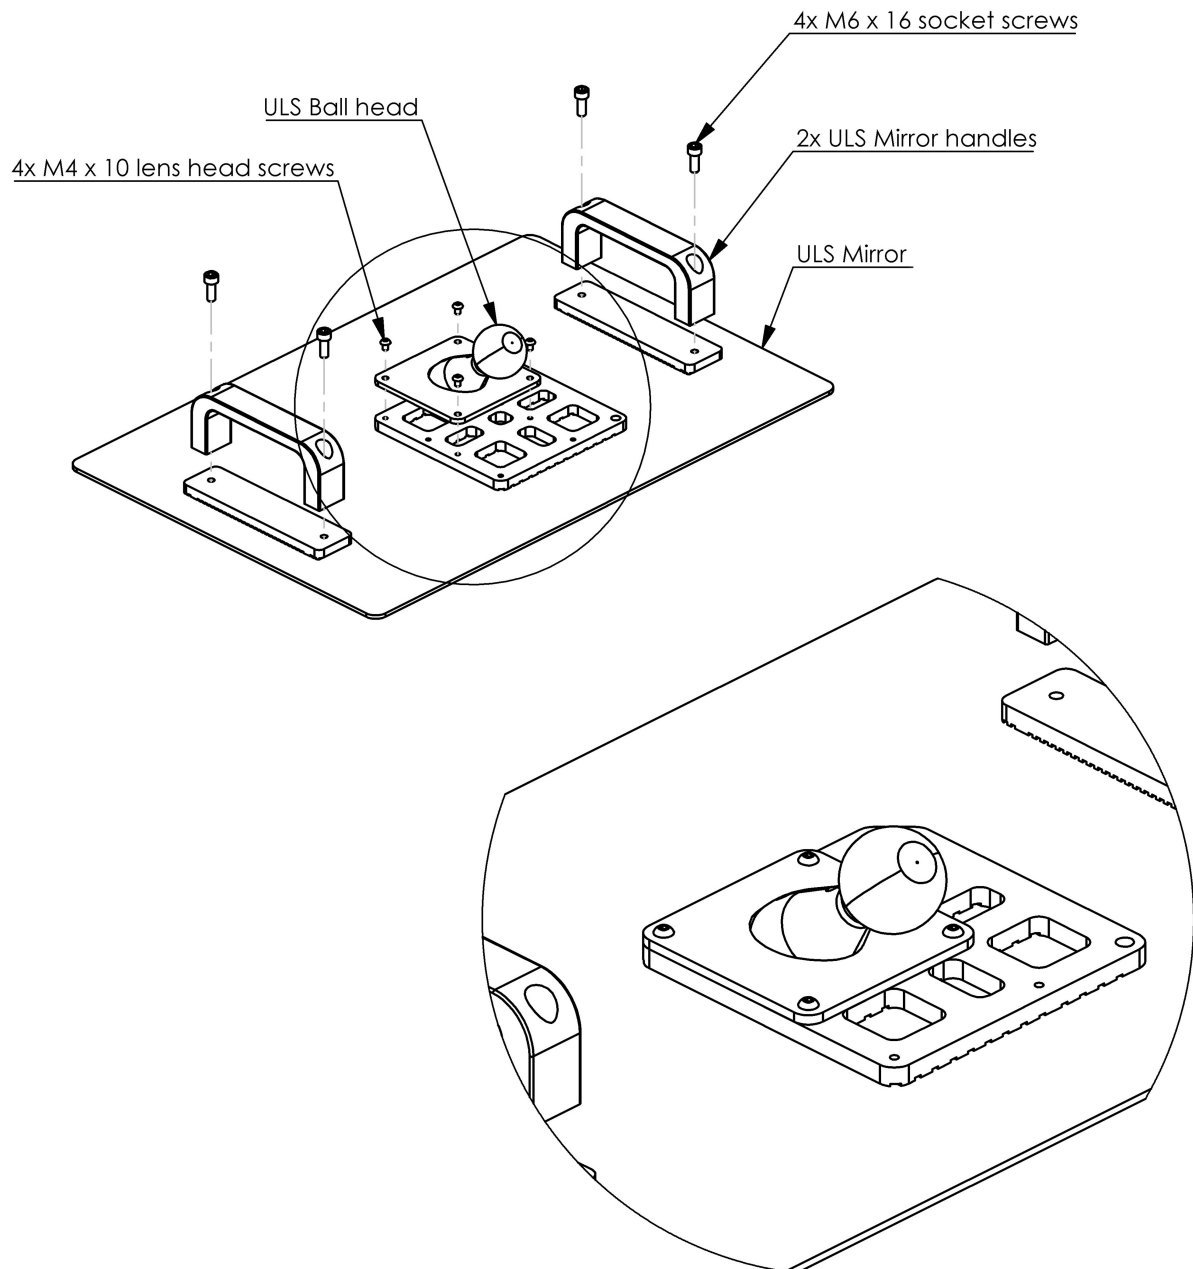





6. Mount the ULS base plate ULS-BP02 onto the projector base plate MHB-2901 by using 2x M6 x 20 socket screw.

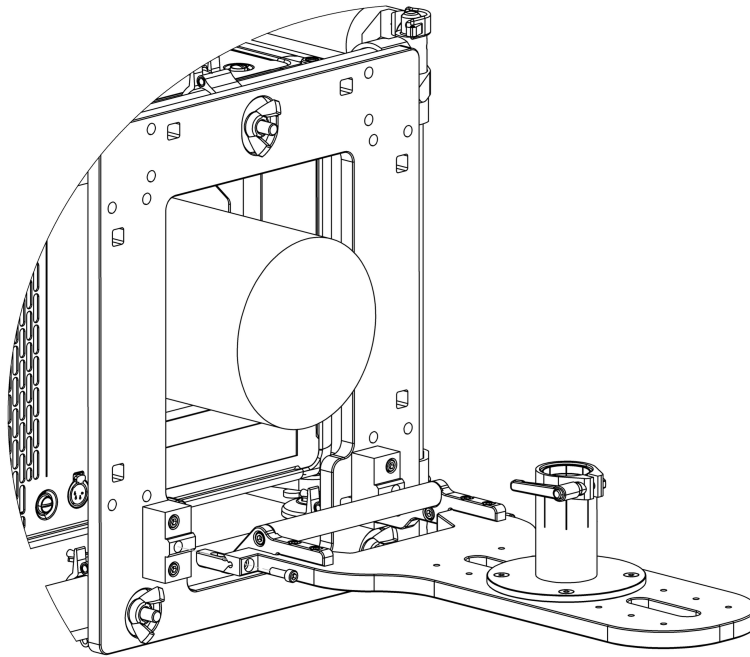

7. Place the ring clamp over the ball head, push the ball head in the ULS Pole ball socket and secure the position with the locking lever.

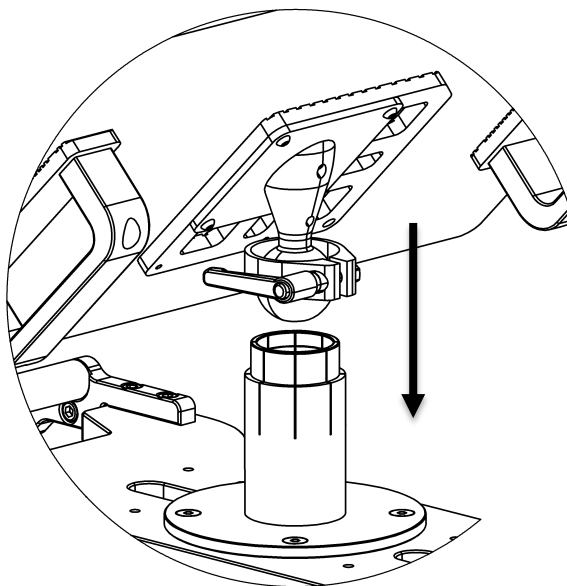

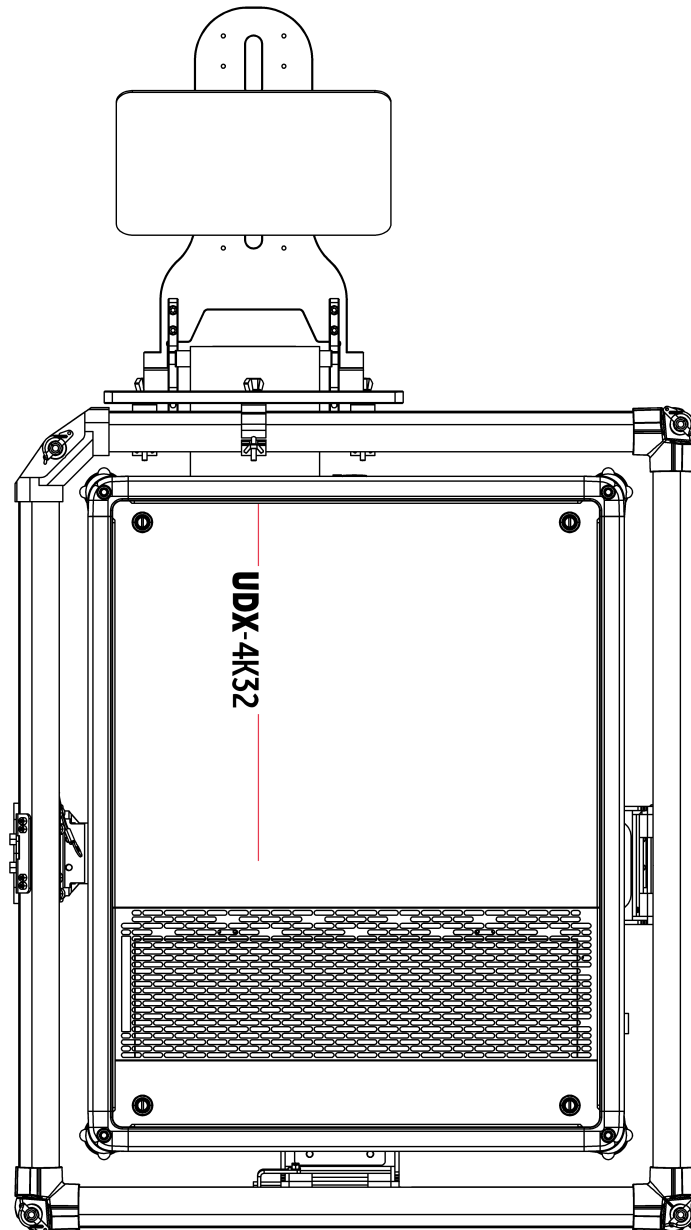

Barco UDX-4K32 with TLD + 1.5-2.0:1 (1.49-2.03:1 4KUHD) + ULS Mirror M340